

## 12 way include 125A switch-disconnector

- Type B 3P+N Distribution board
- 12 ways
- Integrated with 4P 125A switch-disconnector as incomer
- Supplied with dual earth and neutral terminals
- Accepts SP, DP and TP MCBs
- Accepts single module or three module width RCBOs
- Accepts single module width AFDDs
- Complies with BS EN 61439-3



## General information

Mounting method	Surface mounted
Pole configuration	TPN
Number of ways (Type B Board)	12
Rated current of incomer	125
Incomer device	Switch-disconnector 4P 125A
Barcode (EAN-13)	5060690139324

## Technical information

Standard	BS EN 61439-3
Number of phases	Three phase
Rated operational voltage ( $U_e$ )	[ V ] 400
Type of current	AC
Frequency ( $f$ )	[ Hz ] 50
Location type	Indoor
Degree of protection (IP)	IP30
Enclosure material	Steel
Surface finish	Powder coating
Colour	Grey
RAL colour number	7035
Busbar type	Fixed solid copper
Cable entry facility	Top & bottom plates removable for ease of drill or through knock-out at side
Protection device type	Miniature circuit breaker (MCB), SP, DP or TP, up to 63A (10kA) and 100A (6kA), B, C and D curve Residual current circuit breaker with overcurrent protection (RCBO), up to 50A (SP) or 63A (TP) Arc fault detection device (AFDD), up to 50A
Pollution degree	3

### Danson Electrical UK Limited.


# E-TM4512

## Package information

Package level 1		
Type		Box
Number of units in package level 1	[ pcs ]	1
Weight	[ kg ]	18.22
Length	[ cm ]	76.8
Width	[ cm ]	46
Height	[ cm ]	14.5
Package level 2		
Type		Pallet
Number of units in package level 2	[ pcs ]	14
Weight	[ kg ]	306.5
Length	[ cm ]	120
Width	[ cm ]	100
Height	[ cm ]	125

## Dimensions

Width [ mm ]	Height [ mm ]	Depth [ mm ]	X hole [ mm ]	Y hole [ mm ]	Weight [ kg ]
450	753	120	360	628	17.22

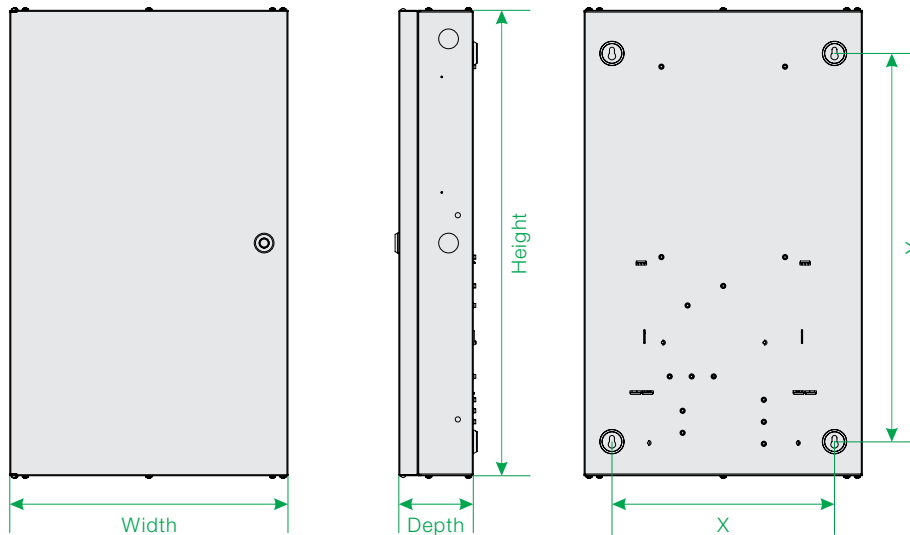

## Certificate

