




4 Channel 4K Compact 1U 4PoE NVR

CODE: EAG-NVR-4K3-2AI-4BB



- Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format
- Supports access, storage, or forwarding at 80 Mbps
- Maximum decoding capability: 16 × 1080p @ 30 fps, with adaptive decoding support
- AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; supports up to 10 face databases and 20,000 face images; 4-channel SMD Plus
- AI by Camera: Face detection and recognition, perimeter protection, SMD Plus, people counting, stereo analysis, and heat mapping
- Compatible with third-party network cameras
- Security baseline 2.3



Function

Face Recognition

Face recognition technology extracts features from captured faces and compares them with those in the face database.

Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, and similar factors. Allows the system to perform secondary recognition of targets, enhancing alarm accuracy.

SMD Plus

Using intelligent algorithms, Smart Motion Detection technology can classify targets that trigger motion detection and filter out alarms caused by irrelevant objects, ensuring effective and accurate alerts.

AI Search

Using AI search, operators can search videos based on target attributes and event types, allowing them to quickly and efficiently determine where and when targets appeared.

Heat Map by Camera

The heat map technology is used to display crowd density and the likelihood of people appearing. It exports and visualises crowd status using different colours. In general, crowd status refers to the statistical analysis of the number of people across spatial and temporal dimensions.

ANPR by Camera

With deep learning algorithms, ANPR technology can recognise vehicle number plate information in images using ANPR cameras. Supports blocklist/allowlist mode and allows searching for target vehicles in recorded video.

Quick Pick

Quick Pick technology enables users to swiftly identify human or vehicle targets of interest, making it easier to retrieve SMD event data.

4 Channel 4K Compact 1U 4PoE NVR

CODE: EAG-NVR-4K3-2AI-4BB

IP /
NETWORK



Technical Specification

System

Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web, Local GUI

AI

AI by Recorder	Face detection, face recognition, perimeter protection, and SMD Plus;
AI by Camera	Face detection; face recognition; perimeter protection; SMD Plus; ANPR; people counting; stereo analysis; heat map

Perimeter Protection

Perimeter Performance AI by Recorder (Number of Channels)	2 channels, 10 IVS rules for each channel
Perimeter Performance of AI by Camera (Number of Channels)	All channels (8 targets/s)

Face Detection

Face Attributes	Gender; age group; glasses; expressions; face mask; beard
Face Detection Performance of AI by Recorder (Number of Channels)	1 channel (up to 12 face images/s each channel)
Face Detection Performance of AI by Camera (Number of Channels)	All channels (8 targets/s)

Face Recognition

Face Database Capacity	Up to 10 face databases with 20,000 images, with a total capacity of 2.5 G. Name, gender, birthday, address, credential type, credential No., countries & regions and state can be added to each face image.
Face Recognition Performance of AI by Recorder (Number of Channels)	4-channel FD (by camera) + FR (by recorder), image stream: 12 face images/s 1-channel FD (by recorder) + FR (by recorder), video stream: 12 face images/s
Face Recognition Performance of AI by Camera (Number of Channels)	All channels (8 targets/s)

SMD Plus

SMD Plus by Recorder	4 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD Plus by Camera	All channels (16 targets/s)

Audio and Video

Access Channel	4 channels
Network Bandwidth	80 Mbps incoming, 80 Mbps recording and 80 Mbps outgoing

Resolution	16 MP; 12 MP; 8 MP; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 960p; 720p; D1; CIF
Decoding Capability	AI disabled: 2-channel 16 MP@30 fps; 2-channel 12 MP@30 fps; 4-channel 8 MP@30 fps AI enabled: 1-channel 16 MP@30 fps; 2-channel 12 MP@30 fps; 3-channel 8 MP@30 fps; 3-channel 6 MP@30 fps; 4-channel 5 MP@30 fps
Video Output	1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable.
Multi-screen Display	1st Screen: 1/4 2nd Screen: 1/4
Third-party Camera Access	Panasonic, Sony, Samsung, Axis, Pelco, Arecont, ONVIF, Canon

Compression Standard

Video Compression	Smart H.265+; H.265; Smart H.264+; H.264; MJPEG
Audio Compression	G.711a; G.711u; PCM; G726

Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; PPPoE; DDNS; FTP; Alarm Server; IP Search; P2P; auto register
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 22.06(Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; IE9 and later; Firefox

Recording Playback

Multi-channel Playback	Up to 4 channels
Record Mode	General, motion detection; intelligent; alarm
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback

Alarm


General Alarm	Motion detection; privacy masking; video loss; scene changing; PIR alarm; IPC external alarm
Anomaly Alarm	Camera disconnection; storage error; disk full; IP conflict; MAC conflict; login locked; and cybersecurity exception
Intelligent Alarm	Face detection; face recognition; perimeter protection; SMD Plus; people counting; stereo analysis; heat map
Alarm Linkage	Record; snapshot; IPC external alarm output; audio; buzzer; log; preset; email

Port

Audio Input	1-channel RCA
Audio Output	1-channel RCA
Disk Interface	1 SATA port, up to 16 TB.The maximum HDD capacity varies with environment temperature.
USB	2 (1 front USB 2.0 port, 1 rear USB 2.0 port)
HDMI	1


4 Channel 4K Compact 1U 4PoE NVR

CODE: EAG-NVR-4K3-2AI-4BB




VGA	1
Network Port	1 (10/100 Mbps Ethernet port, RJ-45)
PoE Port	4 ports, 10/100 Mbps, IEEE 802.3 af/at
General	
Power Supply	53 VDC, 1.226 A
Power Consumption	Total output of NVR is <10 W(without HDD) Total output power of PoE is 36W,the maximum output power of asingle port is 25.5W
Net Weight	0.86 kg (1.90 lb)
Gross Weight	1.88 kg (4.14 lb)
Product Dimensions	260 mm × 232.7 mm × 47.6 mm (10.24" × 9.16" × 1.87") (W × L × H)
Packaging Dimensions	333 mm × 89 mm × 315 mm (13.11" × 3.50" × 12.40") (W × L × H)
Operating Temperature	−10 °C to +55 °C (14 °F to +131 °F)
Storage Temperature	−20 °C to +60 °C (−4 °F to +140 °F)
Operating Humidity	10%–93% (RH), non-condensing
Installation	Rack or desktop
Certifications	FCC: 47 CFR FCC Part15, SubpartB, Class A CE-EMC: EN 55032:2015+A1:2020; EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A1:2019+A2:2021; EN 55035:2017+A11:2020; EN 50130-4:2011+A1:2014 CE-LVD: EN 62368-1:2014

Dimensions (mm[inch])

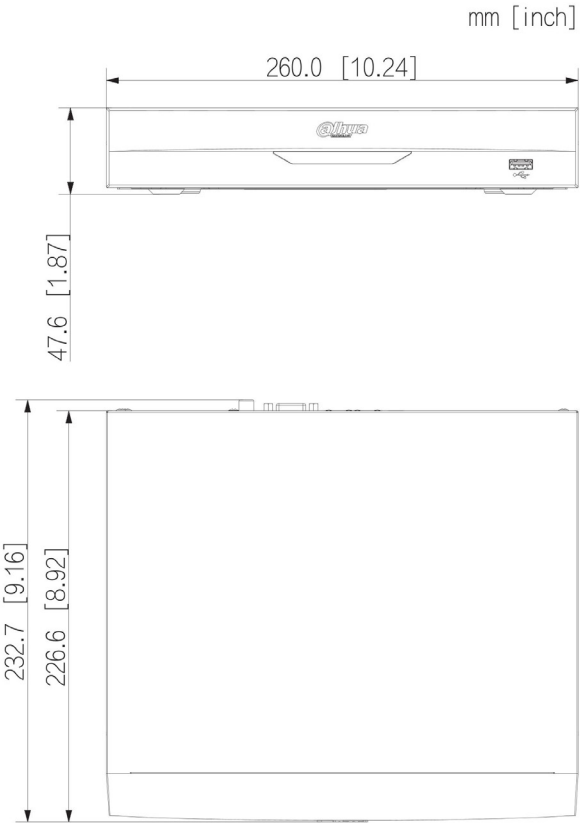

Panels

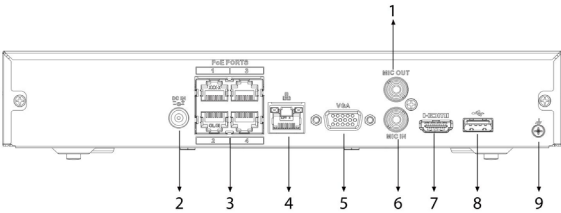

- | | |
|----------------------------|---------------------------|
| 1 AUDIO OUT, RCA Connector | 2 Power Input |
| 3 PoE Ports | 4 Network Port |
| 5 VGA Port | 6 AUDIO IN, RCA Connector |
| 7 HDMI Port | 8 USB Port |
| 9 Ground | |